

# Charge converter CC701





## Key features

- Overload protection
- Strong voltage signal
- Immune to cable motion noise
- Compatible with standard signal readout equipment

The CC701 charge converter is a solid state, in-line device which converts the charge output of a high impedance piezoelectric vibration sensor to a low impedance voltage signal. It incorporates an overload protection circuit and the low noise Piezofet® amplifier. The CC701 yields a strong signal, immune to cable motion noise. It is compatible with standard signal readout equipment such as monitors, voltmeters, analyzers, etc. Long cables can be driven without signal loss. The CC701 charge converter is powered by the constant current source of a Wilcoxon power unit/amplifier (models P702, P703B, P704B, PR710 or PR712), or it can be supplied from an external constant current supply of 18 - 30 VDC, capable of delivering from 2 - 10 mA (a 4 mA constant current diode is recommended).

## Powering diagram

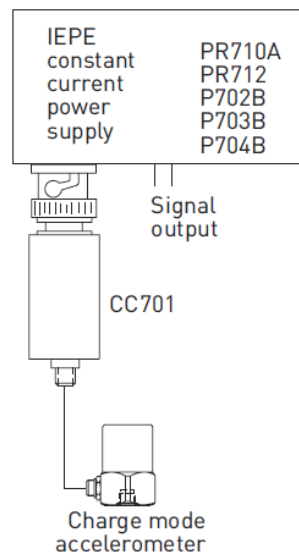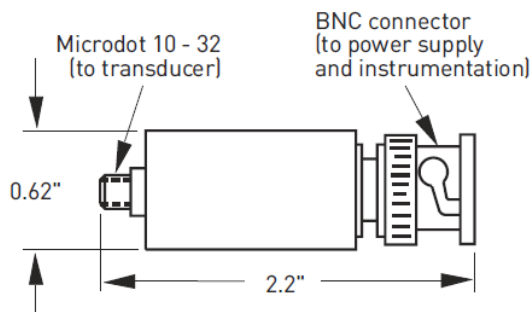

Note: Due to continuous process improvement, specifications are subject to change without notice.  
This document is cleared for public release.

Wilcoxon Sensing Technologies  
20511 Seneca Meadows Parkway  
Germantown, MD 20876  
info@wilcoxon.com

Tel: (301) 330 8811  
Fax: (301) 330 8873  
www.wilcoxon.com

Wilcoxon Sensing Technologies  
An Amphenol Company

# Charge converter CC701

## SPECIFICATIONS

### TRANSFER CHARACTERISTICS<sup>1</sup>

<b>Sensitivity, ±5%</b>		1 mV/pC
<b>Frequency response</b>	<b>± 5%</b> <b>- 3 dB</b>	10 - 25,000 Hz 0.5 Hz
<b>Nonlinearity</b>		<1%
<b>Harmonic distortion</b>		<1%

### INPUT CHARACTERISTICS

<b>Allowable source capacitance, max</b>	6,000 pF
--	----------

### OUTPUT CHARACTERISTICS

<b>Output voltage, max</b>	5 V rms					
<b>Electrical noise, nominal:</b>						
<b>Source capacitance (transducer + cable)</b>	500	1,000	5,000	pF		
<b>Broadband</b>	2.5 Hz to 25 kHz		5	7	10	μV
<b>Spectral</b>	10 Hz	0.50	0.50	0.50	μV/√Hz	
	100 Hz	0.06	0.07	0.15	μV/√Hz	
	1,000 Hz	0.04	0.04	0.07	μV/√Hz	
	10,000 Hz	0.02	0.03	0.05	μV/√Hz	

<b>Output impedance (depending on source capacitance)</b>	25 - 150 Ω
<b>Bias output voltage, nominal</b>	10 VDC

### POWER REQUIREMENTS

<b>Voltage source</b>	18 - 30 VDC
<b>Constant current<sup>2</sup></b>	2 - 10 mA

### ENVIRONMENTAL

<b>Temperature range</b>	-40 to +100° C
--------------------------	----------------

### PHYSICAL CHARACTERISTICS

<b>Weight</b>	40 grams	
<b>Case material</b>	stainless steel	
<b>Connectors</b>		
	<b>Signal input</b>	Microdot 10-32
	<b>Signal output</b>	BNC

## Contact

Wilcoxon Sensing  
Technologies

20511 Seneca Meadows Parkway  
Germantown MD 20876, USA

Tel: +1 301 330 8811  
Fax: +1 301 330 8873

info@wilcoxon.com

www.wilcoxon.com

**Notes:** <sup>1</sup> Measured with 1,000 pF source capacitance, 21V supply, 4 mA.

<sup>2</sup> To minimize the possibility of signal distortion when driving long cables with high vibration signals, 24 to 30 VDC powering is recommended. The higher level constant current source should be used when driving long cables (please consult customer service).

Options: Filtered for high temperature charge mode with sensitivity of 4 mV/pC (CC701-HT); sensitivity 0.1 mV/pC (CC701-1); sensitivity 10 mV/pC (CC701A)

Note: Due to continuous process improvement, specifications are subject to change without notice.  
This document is cleared for public release.

Wilcoxon Sensing Technologies  
20511 Seneca Meadows Parkway  
Germantown, MD 20876  
info@wilcoxon.com

Tel: (301) 330 8811  
Fax: (301) 330 8873  
www.wilcoxon.com

**Wilcoxon Sensing Technologies**  
An Amphenol Company