



Select desired extension leadwire type (in inches) and leadwire termination and options (if desired) by order code number from the tables below.

OPTIONS 4 OR 4,MC

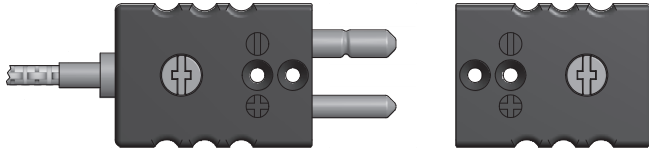

OPTIONS 6 OR 6,MC



OPTION 3



OPTION 2



ORDER CODES

Example Order Number: J0408UM - 012 - 00 - 16 - **F1048** - **6**

4 Extension Leadwire

	CODE	DESCRIPTION	AVAILABLE CALIBRATIONS		TEMP. RATING
Fiberglass	F1	Fiberglass insulation - solid conductor	J	K	482 °C [900 °F]
	F1A	Fiberglass insulation - solid conductor - flexible armor	J	K	482 °C [900 °F]
	F1B	Fiberglass insulation - solid conductor - stainless steel overbraid	J	K	482 °C [900 °F]
	F3	Fiberglass insulation - stranded conductor	J	K	482 °C [900 °F]
	F3B	Fiberglass insulation - stranded conductor - stainless steel overbraid	J	K	482 °C [900 °F]
Fluoropolymer	T1	Fluoropolymer insulation - solid conductor	J	K	204 °C [400 °F]
	T1A	Fluoropolymer insulation - solid conductor - flexible armor	J	K	204 °C [400 °F]
	T3	Fluoropolymer insulation - stranded conductor	J	K	204 °C [400 °F]
PVC	P5	PVC insulation - solid conductor	J	K	105 °C [221 °F]

Insert wire code number and 3 digit "B" length code. Example: F1036 = 36" "B" Length

5 Terminations

CODE	DESCRIPTION
0	Leads not stripped
2	2" split leads, 1/4" stripped
3	2" split leads with spade lugs
4	Standard plug
5	Standard jack
6	Miniature plug
7	Miniature jack
Options	
MC	Mating connector
CC	Plug or jack secured to leads with cable clamp