


CUSTOM SHEATHED RTD'S


Bayonet Probe with Teflon Leads




Bayonet Probe with Armoured Leads



Spring Loaded or Fixed Bushing

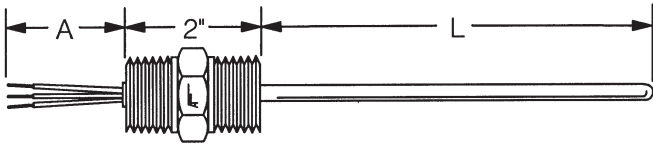


Spring Loaded Oil Seal

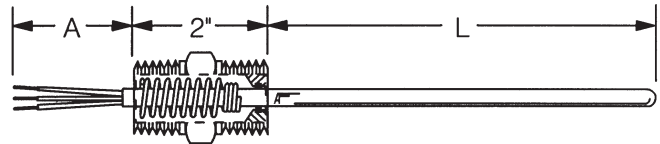


Adjustable Spring




Teflon Jacketed Leads




Tip Sensitive




Flex Armoured Leads




Electrically Isolated




General Purpose



Teflon Leads with Standard Connector




Miniature Connection Head

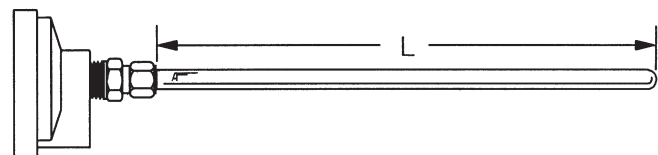

STANDARD ADAPTER


TC5SA - [A] - [X]



18	1/8" NPT
38	3/8" NF


1	7/8"
2	1 3/8"
()	Specify in Inches

PIPE CLAMP ADAPTER

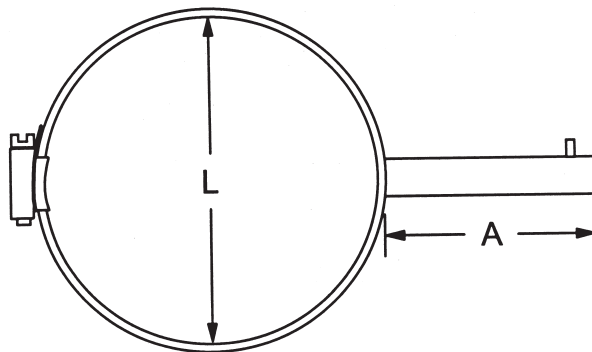

TC5PC - [X] - [X]
 (L) Pipe Diameter
 (A) Inches

OIL SEAL ADAPTER

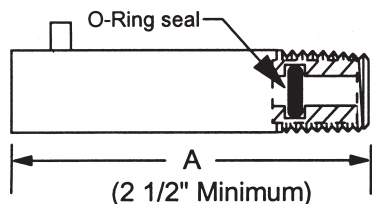

TC5OS - [X]
 (A) Inches

RT4 - [X] - [X] - [X] - [X] - [X] - [X] - [X] - [X] - [X] - [X] - [X]

(L) Inches

(A) Inches

Code	Element
A	100Ω Platinum 385 ± 0.1%
B	100Ω Platinum 385 ± 0.01%
C	100Ω Platinum 392 ± 0.1%
D	120Ω Nickel 627 0.806 Ω/°C
E	10Ω Copper 427 0.039 Ω/°C
()	Other Specify

Code	Probe Diameter
18	1/8" O.D.
14	1/4" O.D.
21	0.215" O.D.
36	3/16" O.D.

Code	Termination
BE	Bare Ended Leads
SC	Standard Connector
MC	Mini Connector
MH	Mini Head

Code	# of Leadwires
2	2 Wire
3	3 Wire
4	4 Wire
4C	4 Wire Compensated Loop

Code	Process Fitting
CF()	Compression Fitting (Specify Process NPT)
SG	Adjustable Spring
FS()	Fixed Hex Bushing (Specify Process NPT)
TX()	Spring Loaded Transmitter Bushing (Specify Process NPT)
OX()	Oil Seal Hex Bushing (Specify Process NPT)
X	Not Required

S	Single Element
D	Dual Element

Code	Probe Style
GP	General Purpose
EI	Electrically Isolated
TS	Tip Sensitive
BP	Bayonet Style
TE	Tip Sensitive/Electrically Isolated
BT	Bayonet/Tip Sensitive

Code	Lead Options
T	Teflon Leadwire
F	Fiberglass Leadwire
AT	Armoured Teflon
AF	Armoured Fiberglass
ST	Standard 6" TFE Leads

Code	Temp. Rating
LT	Low Temp. (204°C Max.)
HT	High Temp. (482°C Max.)
VT	High Temp. High Vibration (850°C)

* Available in most probe styles.
 Minimum lengths apply. Consult factory.

NOTE: 316SS Sheath supplied as standard. If other required, specify at time of order.