



## 613 SERIES

- Ranges from 0 psi to 5 psi through 0 psi to 300 psi
- Current & voltage outputs available
- 316 stainless steel and polyurethane wetted parts
- CE compliant to suppress RFI, EMI and ESD

### APPLICATIONS

- Lift stations
- Sewage
- Slurry tanks
- Storm canals
- Water & wastewater
- Wet wells

### SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc, 3-wire; 0.5 Vdc to 2.5 Vdc, 3-wire
Pressure ranges	0 psi to 5 psi through 0 psi to 300 psi
Accuracy	± 0.25% full scale (BFSL); optional ± 0.125% full scale (BFSL); (includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Stability	≤ ± 0.2% full scale for 1 year, non-accumulating
Response time	≤ 1 ms (between 10% and 90% full scale)
Durability	> 100,000,000 full scale cycles
Temperature measurement	Optional PT100, 4-wire per IEC 60751
Temperature ranges	Compensated 32 °F to 122 °F/0 °C to 50 °C Effect ± 0.01%/ °F for zero and span Media 14 °F to 122 °F / -10 °C to 50 °C Storage -22 °F to 175 °F/ -30 °C to 80 °C
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire, 0 Vdc to 5 Vdc, 3-wire) 5 Vdc to 30 Vdc (0.5 Vdc to 2.5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 0 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 0 Vdc to 5 Vdc, 3-wire
Proof pressure	2 times range
Burst pressure	4 times range
Measuring element	Cage seal: All 316 stainless steel Cable: Polyurethane, optional FEP
Connection	316 stainless steel
Housing material	316 stainless steel
Environmental rating	IP68
Electromagnetic rating	CE compliant to EMC norm EN 61326:1997/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity protection, short circuit and optional lightning protection per EN 6100-4-5; 1.5J
Shock	100 g's according to IEC 60068-2-27
Vibration	15 g's according to IEC 60068-2-6
Weight	Approximately 3.2 lb. - cable extra



\* Unregulated

ORDERING INFORMATION						
SERIES	613					
PRESSURE RANGES	5	0 psi to 5 psi (11.55 ft/H <sub>2</sub> O)	20	0 psi to 20 psi (46.20 ft/H <sub>2</sub> O)		
	10	0 psi to 10 psi (23.10 ft/H <sub>2</sub> O)	30	0 psi to 30 psi (69.30 ft/H <sub>2</sub> O)		
	15	0 psi to 15 psi (34.65 ft/H <sub>2</sub> O)	50	0 psi to 50 psi (115.50 ft/H <sub>2</sub> O)		
ACCURACIES	1	±0.25% full scale (BFSL)	2	±0.125% full scale (BFSL)		
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	5	0 Vdc to 10 Vdc, 3-wire		
	2	0 Vdc to 5 Vdc, 3-wire	11	0.5 Vdc to 2.5 Vdc, 3-wire		
ELECTRICAL CONNECTIONS	XX	Standard polyurethane (PUR) cable NOTE: XX = length of cable in feet.		38-XX	Optional FEP cable	
OPTIONS	CBC	Cable Clamp	FE	Filter Element	LP	Lightning Protection*
	DC	Desiccant Cartridge	JB	Cable Junction Box	LR	Lifting Ring

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

\* Only available with PUR cable

### EXAMPLE

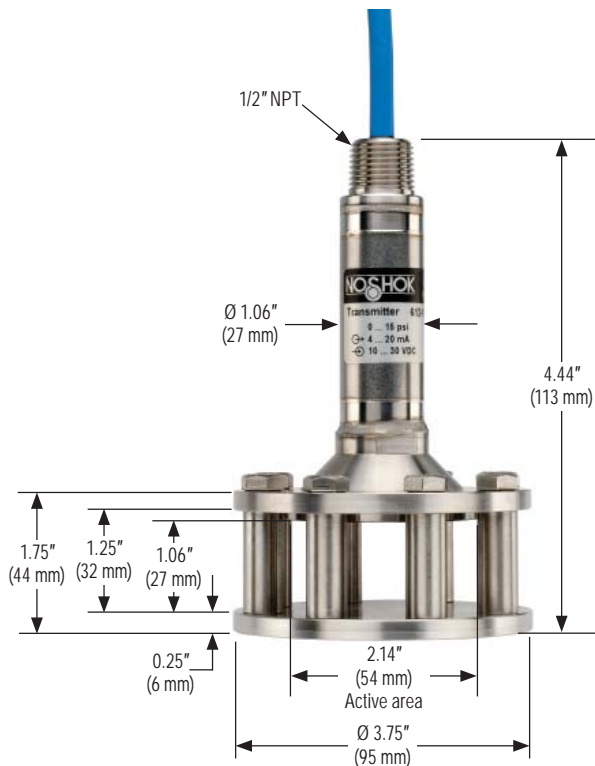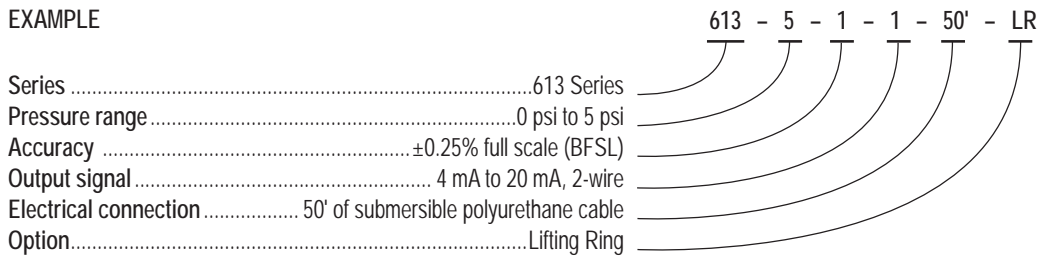

Optional Cable Clamp



Optional Cable Junction Box



Optional Filter Element



Optional Desiccant Cartridge



Optional Lifting Ring