



Press. 5 to 3300 psi

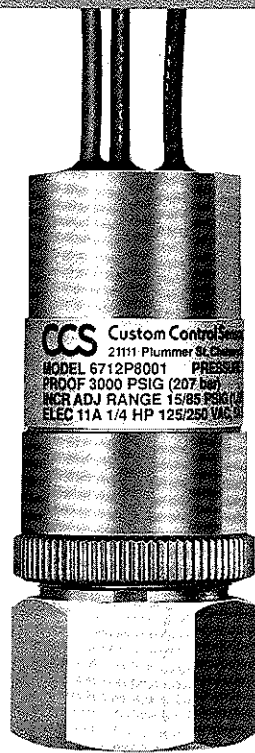

6712P8001
6712P8003

FREE LEADS

ACTUAL
SIZE

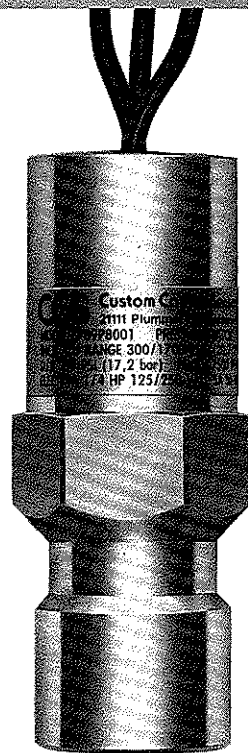

6712P8011
6712P8013

SERIES: 6712

- Standard Features:**
- Piston
 - Internal Adjustment
 - Wide Range
 - Weatherproof
 - NEMA: 4, 13

AMBIENT TEMP. RANGE
-30° to 160°F
-34° to 71°C

How to set switches
Unit can be set prior to installation. Insert 1/8" Allen wrench into adjustment screw (located in pressure port) and turn clockwise to decrease setting.


INTERNAL ADJUSTMENT

MODEL NO.	MODEL DESCRIPTION
6712P8000	PISTON FREE LEADS

OPERATING AND ORDERING DATA:

PRESSURE SWITCHES MODEL 6712P		PISTON PRESSURE SWITCH WITH 1/4" ALUMINUM PRESSURE PORT		FOR HIGH CYCLING—LONG LIFE— HYDRAULIC APPLICATIONS		
Max. Sys. Press.	Proof (Test) Press.	Adj. Set-Point Range		Approx. Dead band	Model Number and Wetted Parts	
		On Incr. Press.	On Decr. Press.			Wetted Parts
2000	3000	15-85	5-75	10	6712P8001	Aluminum 400 S.S. Buna N
2000	3000	70-140	55-125	15	6712P8003	
5000	7500	300-1700	50-1450	250	6712P8011	
5000	7500	1500-3300	1200-3000	300	6712P8013	

SCHEMATIC AND WIRING CODE



ELECTRICAL CHARACTERISTICS:

Rating of Switch Element

VOLTS	AMPERES	
	SPDT	
	Res.	Ind.
125 AC—50/60 Hz	11	11
250 AC—50/60 Hz	11	11
30 DC	5	3
125 DC	.5	.25

HOW TO ORDER:

1. Specify model number.

INSTALLATION DRAWING

