


Select desired leadwire type by order code number, followed by desired length in inches.

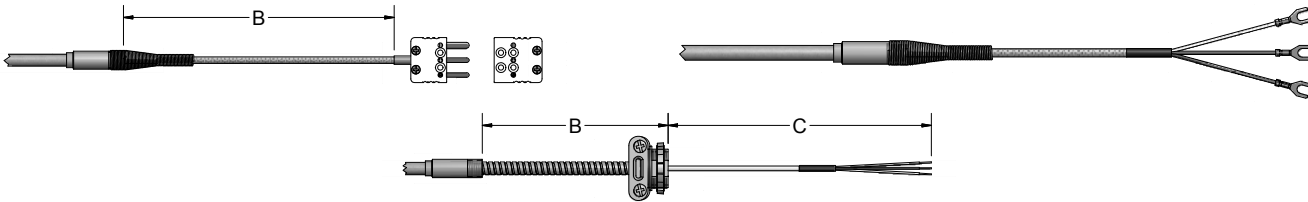

ORDER CODES

Example Order Number:

R5T185L483-006-01A,304-16

T3 036

**PAGE
RTD-5**

4 Extension Leadwire Type and B + C Dimension

CODE	DESCRIPTION	TEMP. RATING
FIBERGLASS		
F3J_ _ _	Fiberglass insulation - individual leads - stranded conductor (12" limit)	482 °C [900 °F]
F3_ _ _	Fiberglass insulation - stranded conductor	
F3A_ _ _	Fiberglass insulation - stranded conductor - flexible armor	
F3B_ _ _	Fiberglass insulation - stranded conductor - stainless steel overbraid	
FLUOROPOLYMER		
T3J_ _ _	Fluoropolymer insulation - individual leads - stranded conductor (12" limit)	204 °C [400 °F]
T3_ _ _	Fluoropolymer insulation - stranded conductor	
T3A_ _ _	Fluoropolymer insulation - stranded conductor - flexible armor	
T3B_ _ _	Fluoropolymer insulation - stranded conductor - stainless steel overbraid	
M3_ _ _	Fluoropolymer insulation - stranded conductor - stainless steel overbraid - Fluoropolymer insulation	
T3M_ _ _	Fluoropolymer insulation - stranded conductor - polyester shield	
T3MA_ _ _	Fluoropolymer insulation - stranded conductor - polyester shield - flexible armor	
POLYIMIDE		
K3_ _ _	Polyimide insulation - stranded conductor	316 °C [600 °F]
K3A_ _ _	Polyimide insulation - stranded conductor - flexible armor	
K3B_ _ _	Polyimide insulation - stranded conductor - stainless steel overbraid	
SILICON RUBBER		
S3_ _ _	Fluoropolymer insulation - stranded conductor - silicon rubber	204 °C [400 °F]
COIL CORDS		
C3060	PVC insulation - stranded conductor - coil cord - 60" extended length	104 °C [220 °F]
C3120	PVC insulation - stranded conductor - coil cord - 120" extended length	

Insert wire code number and 3 digit 'B' length in inches EXAMPLE: T3036 = 36" B length

For assemblies requiring leadwire beyond the flexible armor (illustrated in 'C' in drawing), insert 3 digit 'C' length after armor length. EXAMPLE: F3A036 -012 = 36" B length with additional 12" 'C' length leads beyond armor.

All insulated leadwires in flexible armor are available with either extruded PVC or FEP covering over the flexible armor. Substitute suffix codes T (FEP) or P (PVC) for the suffix 'A' code above. EXAMPLE: T3T is FEP covered armor.